

Stainless Steel Fuel Polishing System

FPS-30

NOT FOR USE WITH GASOLINE



Included with Every FPS-30

- 1,200+ GPH from a 30 GPM continuous-duty pump
- 8x32 filter-less purifier removes water & solids
- Six 10-micron filters supplied with the system
- Two 20-ft anti-static hoses with cam-lock fittings
- 115 V motor — ready for shop or job-site power
- Dual 10-micron spin-on filters with change gauges
- Model 200-900 magnetic fuel conditioner
- Digital flow meter, water-sensor alarm, 25-ft cord

1,200+ GPH

Rated Flow

30 GPM

Continuous Pump

10 µm Dual

Final Filtration

2,000+ gal

Ideal Job Size

220 lb

Dry Weight



Built for 2,000-Gallon-Plus Polishing Jobs

The FPS-30 is a modular tank cleaning and fuel polishing system for transfer and/or recirculation of diesel fuel in larger storage tanks, boats, and generators. A 115-volt, 30 GPM continuous-duty pump delivers over 1,200 gallons per hour through a Dieselcraft 8×32 maintenance-free filter-less purifier, a Model 200-900 magnetic conditioner, and dual 10-micron spin-on filters. Six filters ship with the unit. All pipe is stainless steel; all fasteners are Grade 8 with serrated lock nuts.

Storage Tanks

Polish bulk diesel that sits for months — the 2,000-gallon-plus class.

Boats

Transfer and recirculate marine diesel before it reaches injectors.

Generators

Protect standby power tanks between exercise cycles.

In the Field




On the job with the FPS-30

Shop and field ready. Pre-filter and digital timer available as options.



Job-site tank work

Bulk-tank polishing in the field.

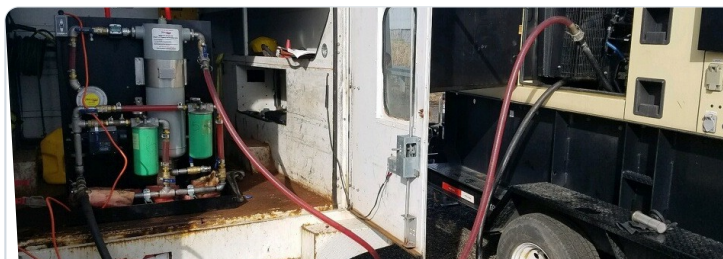

Generator service

Trailer-mounted system on a standby generator.

Specifications

Model	FPS-30 stainless steel diesel fuel polishing system
Pump	30 GPM continuous-duty vane pump, 115 V
Rated flow	Over 1,200 GPH
Primary separation	Dieselcraft 8×32 filter-less purifier — maintenance-free
Secondary filtration	Dual 10-micron spin-on filters with change-indicator gauges
Filters included	Six 10-micron spin-on cartridges
Conditioning	Dieselcraft Model 200-900 magnetic fuel conditioner
Instrumentation	Digital flow meter + water-sensor alarm + filter gauges
Hoses / power	2 × 20 ft anti-static hoses with cam-locks · 25 ft power cord
Construction	All stainless pipe · stainless frame & drip pan · Grade 8 lock nuts
Duty range	2,000 gallon and larger polishing jobs
Weight / options	Dry weight 220 lb · Optional pre-filter and digital timer
Fuel	Diesel only — not for use with gasoline